

300mA, Low Noise High PSRR LDO Regulator

Description

The FP6187 is a low dropout, low noise, high PSRR, low quiescent current positive linear regulator. The FP6187 can supply 300mA output current with low dropout voltage at about 150mV that optimized for battery-powered systems or portable wireless devices such as mobile phones. The shutdown function can provide remote control for the external signal to decide the on/off state of FP6187 that consumes less than 0.1 μ A during shutdown mode.

The FP6187 regulator is able to operate with output capacitors as small as 1 μ F for stability. The FP6187 fault protection includes the current limit protection and current foldback protection.

The FP6187 offers high precision output voltage of $\pm 1\%$. The FP6187 is available in UTDFN-4L (1mm \times 1mm) and SOT-23-5 packages which features small size.

Features

- Low V_{IN} and Wide V_{IN} Range: 1.5V to 5.5V
- Output Current 300mA^{*1}
- $\pm 1\%$ Output Voltage Accuracy
- Output Noise 65 μ Vrms from 10Hz to 100kHz
- V_{OUT} Fixed 1V to 3.3V
- Low Dropout Voltage of 150mV at 3V/300mA
- Ripple Rejection 75dB at 1kHz
- Low Quiescent Current at 45 μ A
- Needs Only 1 μ F Capacitor for Stability
- Current Limit Protection
- Current Foldback Protection
- Output Discharge Function
- UTDFN-4L (1mm \times 1mm) and SOT-23-5 Packages
- RoHS Compliant


*1 Attention should be paid to the power dissipation of the package when the output current is large.

Applications

- PDAs, Mobile phones, GPS, Smartphones
- Wireless Handsets, Wireless LAN, Bluetooth®, Zigbee®
- Portable Medical Equipment
- Other Battery Powered Applications

Pin Assignment

X6 Package (UTDFN-4L, 1.0x1.0x0.4mm) (Top view)



S5 Package (SOT-23-5)




Figure 1. Pin Assignment of FP6187

Ordering Information

FP6187-

Package Type
X6: UTDFN-4L
S5: SOT-23-5

Output Voltage
10: 1.0V 1J: 1.05V
11: 1.1V 12: 1.2V
18: 1.8V 28: 2.8V
30: 3.0V 33: 3.3V

Marking Information

Part Number	Product Code
FP6187-10X6	YJ
FP6187-1JX6	YK
FP6187-11X6	YL
FP6187-12X6	YM
FP6187-18X6	YP
FP6187-28X6	YT
FP6187-30X6	YU
FP6187-33X6	YV

Note: Please consult Fitipower sales office or authorized distributors for availability of special output voltages.

Typical Application Circuit

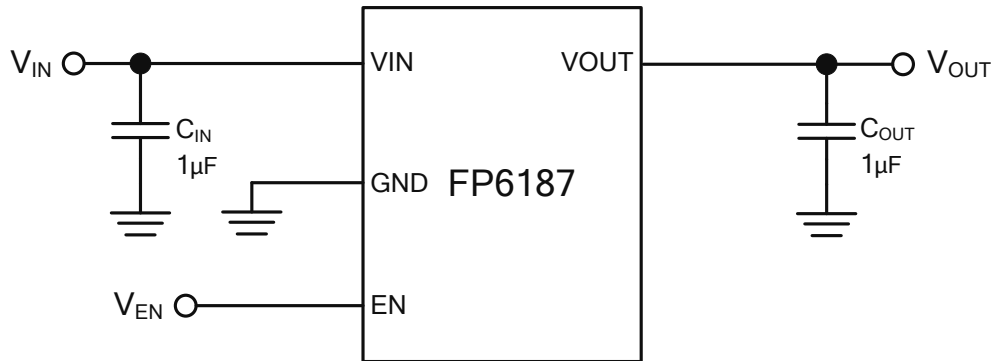


Figure 2. Typical Application Circuit of FP6187

Note 1: To prevent oscillation, it is recommended to use minimum 1µF X7R or X5R dielectric capacitors if ceramics are used as input/output capacitors.

Functional Pin Description

Pin Name	Pin No. (SOT-23-5)	Pin No. (UTDFN-4L)	Pin Function
VIN	1	4	Power is supplied to this device from this pin which is required an input filter capacitor. In general, the input capacitor in the range of 1µF to 10µF is sufficient.
GND	2	2	Common ground pin.
EN	3	3	Pull this pin high to enable IC, pull this pin low to shutdown IC. Floating this pin will be shutdown due to the built-in pull-low resistor.
NC	4	-	NC.
VOUT	5	1	The FP6187 is stable with an output capacitor 1µF or greater. The larger output capacitor will be required for application with larger load transients. The large output capacitor could reduce output noise, improve stability and PSRR.

Block Diagram

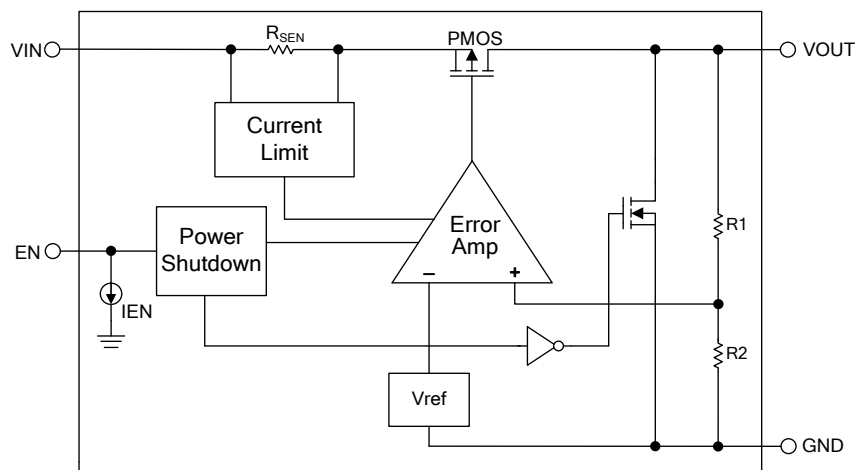


Figure 3. Block Diagram of FP6187

Absolute Maximum Ratings ^(Note 2)

- Supply Voltage V_{IN} ----- -0.3V to +6.5V
- EN Voltage V_{EN} ----- -0.3V to $V_{IN} + 0.3V$
- Power Dissipation @ $T_A = 25^\circ C$ & $T_J = 125^\circ C$ (P_D)
 - UTDFN-4L(1mmx1mm) ----- 0.5W
 - SOT-23-5 ----- 0.4W
- Package Thermal Resistance (θ_{JA}) ^(Note 3)
 - UTDFN-4L(1mmx1mm) ----- $195^\circ C/W$
 - SOT-23-5 ----- $250^\circ C/W$
- Package Thermal Resistance (θ_{JC})
 - UTDFN-4L(1mmx1mm) ----- $65^\circ C/W$
 - SOT-23-5 ----- $130^\circ C/W$
- Lead Temperature (Soldering, 10sec.) ----- $+260^\circ C$
- Junction Temperature (T_J) ----- $-40^\circ C$ to $+150^\circ C$
- Storage Temperature (T_{STG}) ----- $-65^\circ C$ to $+150^\circ C$

Note 2: Stresses beyond this listed under "Absolute Maximum Ratings" may cause permanent damage to the device.

Note 3: θ_{JA} is measured at $25^\circ C$ ambient with the component mounted on a high effective thermal conductivity 4-layer board of JEDEC-51-7. The thermal resistance greatly varies with layout, copper thickness, number of layers and PCB size.

Recommended Operating Conditions

- VIN Supply Voltage ----- +1.5V to +5.5V
- Output Current (I_{OUT}) ----- 300mA
- Operating Temperature Range (T_{OPR}) ----- $-40^\circ C$ to $+85^\circ C$
- Operating Junction Temperature Range (T_J) ----- $-40^\circ C$ to $+125^\circ C$

Electrical Characteristics

($V_{IN}=V_{OUT}+1V$, EN pin connected to V_{IN} , $C_{IN}=1\mu F$, $C_{OUT}=1\mu F$, $T_A=25^\circ C$, unless otherwise specified.)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Input Voltage Range	V_{IN}		1.5		5.5	V
Quiescent Current	I_Q	$I_{OUT}=0A$		45		μA
Standby Current	I_{STBY}	EN Pin Connected to GND		0.1	1	μA
Output Voltage Accuracy	ΔV_{OUT}	$I_{OUT}=1mA$	-1		+1	%
Dropout Voltage (Note 4)	V_{DROP}	$I_{OUT}=300mA$	$V_{OUT}=1.0V$	650	850	mV
			$V_{OUT}=1.2V$	440	570	
			$V_{OUT}=1.8V$	230	300	
			$V_{OUT}=2.8V$	160	210	
			$V_{OUT}=3.0V$	150	200	
			$V_{OUT}=3.3V$	135	180	
Line Regulation	ΔV_{LINE}	$I_{OUT}=1mA$, $V_{IN}=V_{OUT}+1V$ to 5V		1	8	mV
Load Regulation (Note 5)	ΔV_{LOAD}	$I_{OUT}=0A$ to 300mA		6	30	mV
Ripple Rejection (Note 6)	PSRR	$V_{IN}=V_{OUT}+1V_{DC}+0.2V_{P-P(AC)}$, $f_{RIPPLE}=1KHz$, $V_{OUT} \geq 1.8V$, $I_{OUT}=30mA$		75		dB
Output Noise Voltage (Note 6)	V_{NOISE}	$C_{OUT}=1\mu F$, $I_{OUT}=30mA$ $BW=10Hz \sim 100KHz$		65		μV_{RMS}
Current Limit	I_{LIMIT}		320			mA
Current Foldback	I_{CFB}	$R_{Load}=1\Omega$		60		mA
Output Discharge Resistance	R_{DIS}	$V_{EN}=0V$		60		Ω
EN Pin Current	I_{EN}	$V_{EN}=2.5V$		0.3		μA
EN Pin Threshold	$V_{EN(ON)}$	Start-up	1.0			V
	$V_{EN(OFF)}$	Shutdown			0.4	V

Note 4: The dropout voltage is defined as $V_{IN}-V_{OUT}$, which is measured when V_{OUT} drops 2% of its normal value with the specified output current.

Note 5: Load regulation and dropout voltage are measured at a constant junction temperature by using a 40ms low duty cycle current pulse.

Note 6: Guarantee by design.

Application Information

The FP6187 is a low dropout linear regulator that could provide 300mA output current at dropout voltage about 150mV (3V output voltage).

1. Output and Input Capacitor

The FP6187 regulator is designed to be stable with a wide range of output capacitors. The ESR of the output capacitor affects stability. Larger value of the output capacitor decreases the peak deviations and improves transient response for larger current changes.

The capacitor types (aluminum, ceramic, and tantalum) have different characterizations such as temperature and voltage coefficients. All ceramic capacitors are manufactured with a variety of dielectrics, each with different behavior across temperature and applications. Common dielectrics used are X5R, X7R and Y5V. It is recommended to use 1 μ F to 10 μ F X5R or X7R dielectric ceramic capacitors with 30m Ω to 50m Ω ESR range between device outputs and ground for stability. The FP6187 is designed to be stable with low ESR ceramic capacitors and higher values of capacitors and ESR could improve output stability. The ESR of output capacitor is very important because it generates a zero to provide phase lead for loop stability.

There are no requirements for the ESR on the input capacitor, but its voltage and temperature coefficient have to be considered for device application environment.

2. Protection Features

In order to prevent overloading condition from damaging the device, FP6187 has current limiting function designed to protect the device.

3. Thermal Consideration

The power handling capability of the device will be limited by allowable operation junction temperature (125°C). The power dissipated by the device will be estimated by $P_D = I_{OUT} \times (V_{IN} - V_{OUT})$. The power dissipation should be lower than the maximum power dissipation listed in "Absolute Maximum Ratings" section.

4. Shutdown Operation

The FP6187 is shutdown by pulling the EN input low, and turned on by driving the EN high. If EN pin floating, the FP6187 will shut down because EN pin has built-in a pull low resistor (refer to Block Diagram).

5. Output Discharge Function


The FP6187 provides auto discharge function, an discharge MOSFET with $R_{DS(ON)}$ of 60 Ω typical is integrated between VOUT and GND pins, which can discharge the charge of the output capacitors quickly when turning off FP6187 with EN pin.

6. PCB Layout Recommendation

Place the input capacitors and output capacitors as close to the device as possible. The traces which connect to these capacitors should be as short and wide as possible to minimize parasitic inductance and resistance.


PCB Footprint

UTDFN-4L 1.0×1.0mm Package (Unit: mm)

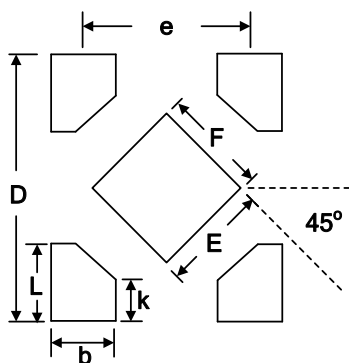

SYMBOLS UNIT	DIMENSION IN MILLIMETER
D	1.3
E	0.48
F	0.48
L	0.4
k	0.22
b	0.25
e	0.625


SOT-23-5 Package (Unit: mm)

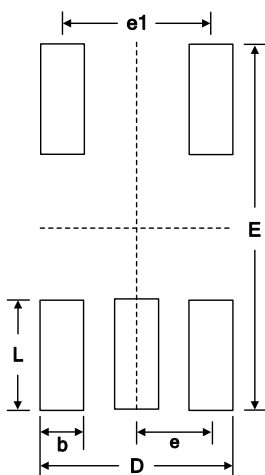

SYMBOLS UNIT	DIMENSION IN MILLIMETER
b	0.55
D	2.45
E	3.80
L	1.27
e	0.95
e1	1.90

Outline Information


UTDFN- 4L 1.0mm x 1.0mm x 0.4mm (pitch 0.65 mm) Package (Unit: mm)

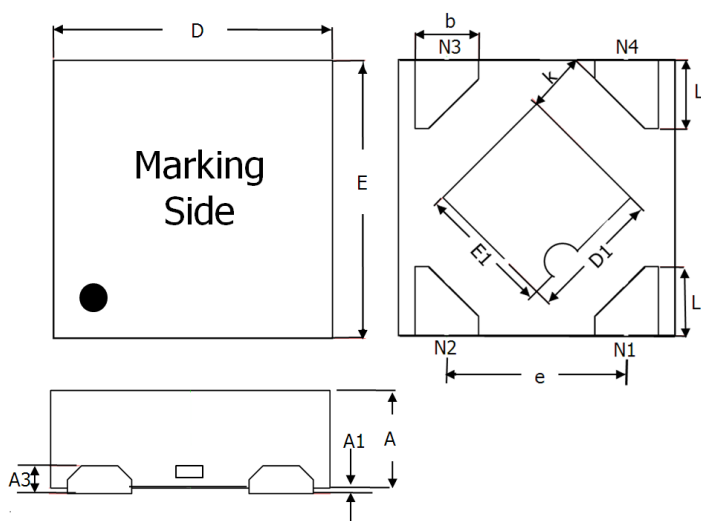

SYMBOLS UNIT	DIMENSION IN MILLIMETER	
	MIN	MAX
A	0.340	0.400
A1	0.00	0.050
A3	0.102REF.	
D	0.950	1.050
E	0.950	1.050
D1	0.380	0.580
E1	0.380	0.580
k	0.200REF	
b	0.180	0.300
e	0.650TYP	
L	0.200	0.300

Note: Followed From JEDEC 664-1.


Carrier Dimensions

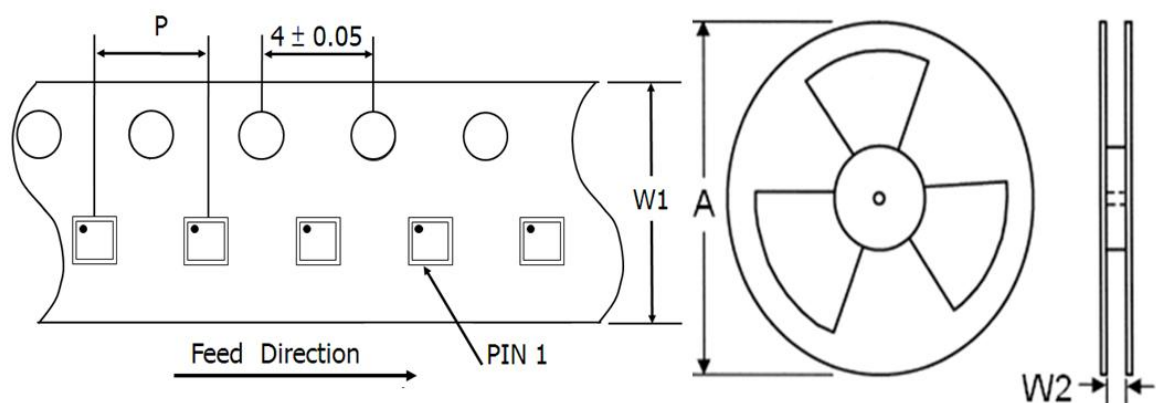

Tape Size (W1) mm	Pocket Pitch (P) mm	Reel Size (A)		Reel Width (W2) mm	Empty Cavity Length mm	Units per Reel
		in	mm			
8	4	7	180	9.5	400~1000	5000

Outline Information (Continued)


SOT-23-5 Package (Unit: mm)

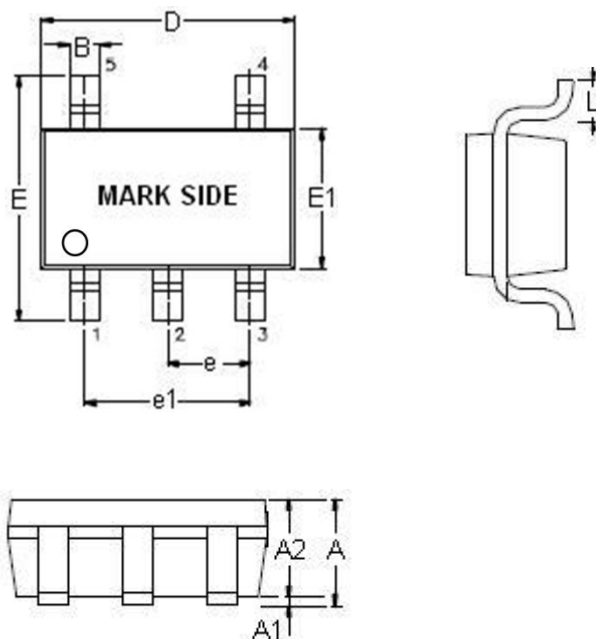

SYMBOLS UNIT	DIMENSION IN MILLIMETER	
	MIN	MAX
A	0.90	1.45
A1	0.00	0.15
A2	0.90	1.30
B	0.30	0.50
D	2.80	3.00
E	2.60	3.00
E1	1.50	1.70
e	0.90	1.00
e1	1.80	2.00
L	0.30	0.60

Note: Followed From JEDEC MO-178-C.

Carrier Dimensions

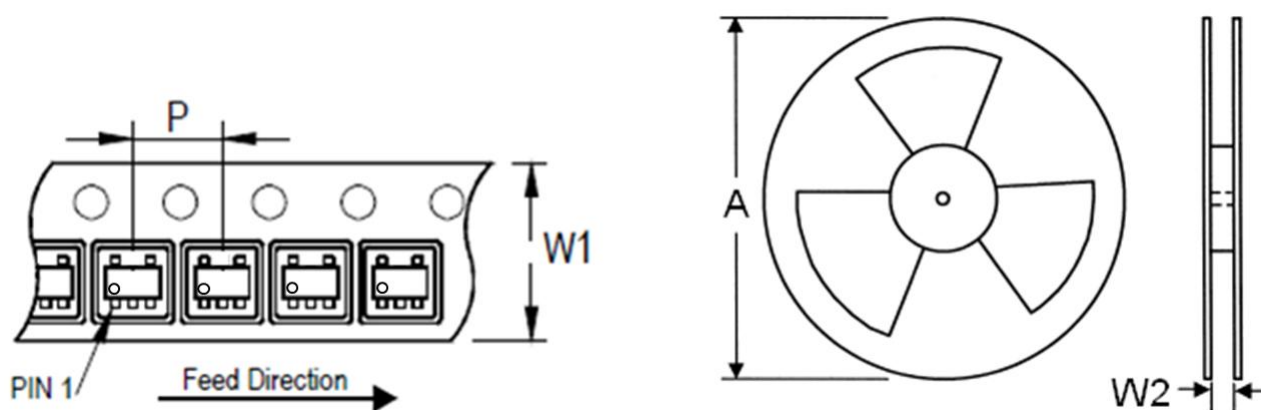

Tape Size (W1) mm	Pocket Pitch (P) mm	Reel Size (A)		Reel Width (W2) mm	Empty Cavity Length mm	Units per Reel
		in	mm			
8	4	7	180	8.4	300~1000	3,000

Life Support Policy

Fitipower's products are not authorized for use as critical components in life support devices or other medical systems.