

## High-Efficiency, 29V White LED Driver with Dimming Control

### Description

The FP6755 is a step-up DC/DC converter specifically designed for driving WLEDs with a constant current. The FP6755 can drive up to 8 white LEDs in series from a Lithium Ion battery. Series connection of LEDs provides identical LED current for uniform brightness and minimizes the number of traces to the LEDs. The FP6755 uses current mode, fixed frequency of approximately 1.3MHz architecture to regulate the LED current through an external current sense resistor. The low feedback voltage of 195mV can minimize power dissipation.

Other features include current limit protection, thermal shutdown protection, under-voltage lockout (UVLO), and over-voltage function, which can shut off the device if output voltage reaches above 29V.

The FP6755 is available in space saving SOT-23-6, TSOT-23-6 and TDFN-6 (2mmx2mm) packages.

### Features


- Wide Range for PWM Dimming, Ranging from 100Hz to 50kHz
- High Efficiency: 87%
- Drives up to 8 WLEDs
- Fast 1.3MHz Switching Frequency
- Low 195mV Feedback Voltage
- Over Voltage Protection
- Low Profile SOT-23-6 , TSOT-23-6 and TDFN-6 (2mmx2mm) Packages
- RoHS Compliant

### Applications


- Cellular Phone
- Digital Camera
- LCD Panel Backlight
- GPS Receiver
- PDA, Handheld Computer

### Pin Assignments

#### S6 Package (SOT-23-6)



#### S9 Package (TSOT-23-6)



#### WD Package (TDFN-6 (2mmx2mm))





Figure 1. Pin Assignment of FP6755

### Ordering Information

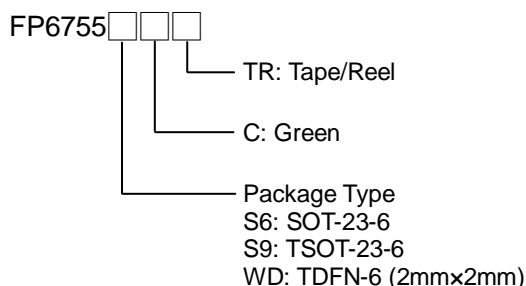

#### SOT-23-6 Marking

Part Number	Product Code
FP6755S6CTR	FG4

#### TSOT-23-6 Marking

Part Number	Product Code
FP6755S9CTR	FG5

#### TDFN-6 (2mmx2mm) Marking

Part Number	Product Code
FP6755WDCTR	FG6

## Typical Application Circuit

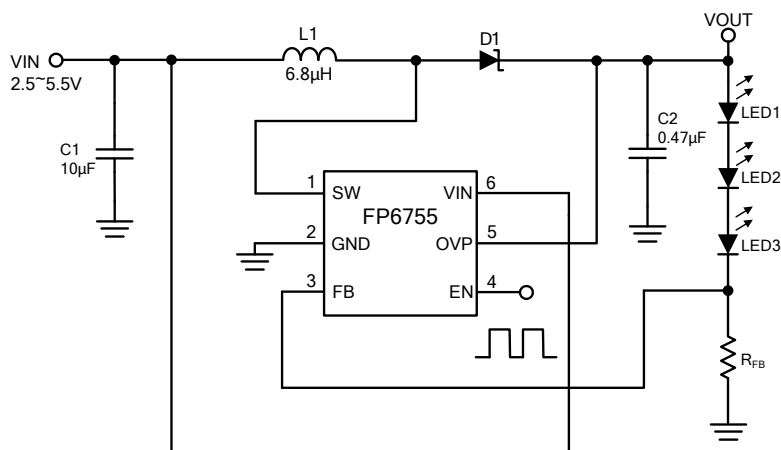


Figure 2. Typical Application Circuit of FP6755 (SOT-23-5 and TSOT-23-6 Package)

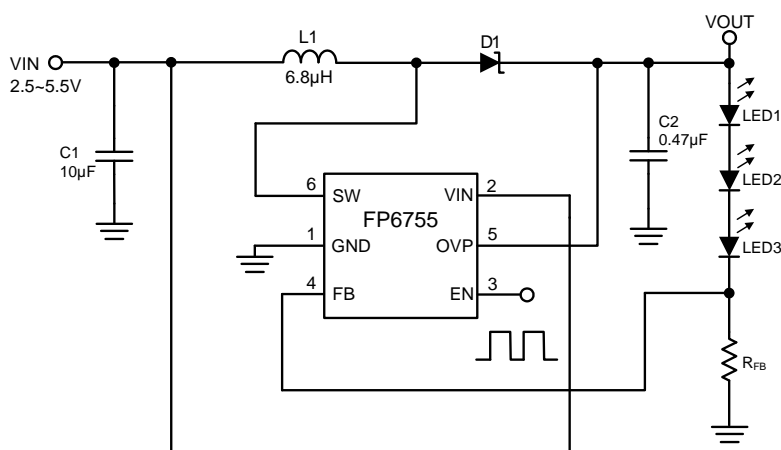


Figure 3. Typical Application Circuit of FP6755 (TDFN-6 Package)

## Functional Pin Description

Pin Name	Pin No. (SOT-23-6) (TSOT-23-6)	Pin No. (TDFN-6)	Pin Function
SW	1	6	Switch Node Pin. Connect inductor/diode here. Minimize trace area at this node to reduce EMI.
GND	2	1	Ground Pin. Connect directly to local ground plane.
FB	3	4	Feedback Pin. Reference voltage is 195mV. Connect cathode of the lowest LED and resistor here. Calculate resistor value according to the formula: $R_{FB} = V_{FB} / I_{LED}$
EN	4	3	Enable and dimming control 1. Enable: Logic high enables the device; logic low forces the device into shutdown mode. 2. Digital dimming control: apply external 100Hz to 50kHz PWM pulse signal with amplitude greater than 1.5V.
OVP	5	5	Over Voltage Input. OVP measures the output voltage for open circuit protection. Connect OVP to the output at the top of the LED string.
VIN	6	2	Input Supply Pin. Must be locally bypassed.

## Block Diagram

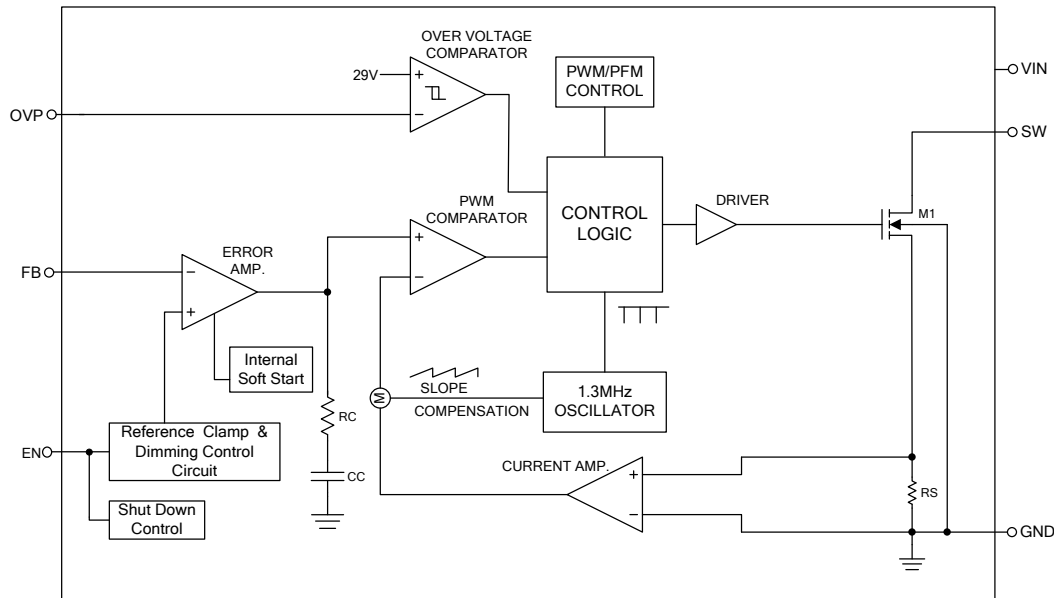


Figure 4. Block Diagram of FP6755

## Absolute Maximum Ratings

- VIN ----- +6V
- SW Voltage ----- +34V
- FB Voltage ----- +6V
- EN Voltage ----- +6V
- Maximum Junction Temperature ( $T_J$ ) ----- +150°C
- Power Dissipation @  $T_A=25^\circ\text{C}$ , ( $P_D$ )
  - SOT-23-6/TSOT-23-6 ----- + 0.40W
  - TDFN-6 (2mmx2mm) ----- +1.25W
- Package Thermal Resistance, ( $\theta_{JA}$ )
  - SOT-23-6/TSOT-23-6 ----- +250°C/W
  - TDFN-6 (2mmx2mm) ----- +80°C/W
- Storage Temperature Range ( $T_S$ ) ----- -65°C to +150°C
- Lead Temperature (Soldering, 10 sec.) ( $T_{LEAD}$ ) ----- +260°C

Note 1 : Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device.

## Recommended Operating Conditions

- Input Voltage ( $V_{IN}$ ) ----- +2.5 to +5.5V
- Operating Temperature Range ----- -40°C to +85°C

## Electrical Characteristics

( $V_{IN}=V_{EN}=5V$ ,  $T_A=+25^{\circ}C$ , unless otherwise noted)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Operating Input Voltage	$V_{IN}$		2.5		5.5	V
Operation Current	$I_{SD}$	$V_{EN}=0V$		4	8	$\mu A$
	$I_Q$	$V_{FB}=0.2V$		430	550	$\mu A$
Switching Frequency	$f_{SW}$		1.0	1.3	1.5	MHz
Maximum Duty Cycle	Duty	$V_{FB}=0V$	90			%
<b>Under Voltage Lockout</b>						
VIN Under Voltage Lockout	UVLO	$V_{IN}$ Rising		2.25	2.45	V
Under Voltage Lockout Hysteresis				300		mV
Open Lamp Shutdown Threshold	$V_{OV}$	$V_{OUT}$ Rising	28	29		V
<b>Enable</b>						
EN OFF Threshold		$V_{EN}$ Falling			0.3	V
EN ON Threshold		$V_{EN}$ Risingd	1.4			V
Dimming On Time	$T_{ON}$	PWM=20kHz at $V_{IN}=5V$ .	6			$\mu s$
<b>Feedback</b>						
FB Voltage	$V_{FB}$	$V_{EN}=1.5V$	185	195	205	mV
FB Input Bias Current	$I_{FB}$	$V_{FB}=0.1V$		-300		nA
<b>Output Switch</b>						
SW ON-Resistance (Note 2)	$R_{ON}$			0.25		$\Omega$
SW Current Limit (Note 2)	$I_{LM}$			2		A
Thermal Shutdown (Note 2)	$T_{SD}$			150		$^{\circ}C$

Note 2 : The specification is guaranteed by design, not production test.

## Typical Performance Curves

$V_{IN}=5V$ ,  $C1=10\mu F$ ,  $C2=1\mu F$ ,  $L1=6.8\mu H$ , 5S5P WLEDs.  $T_A=+25^{\circ}C$ , unless otherwise noted.

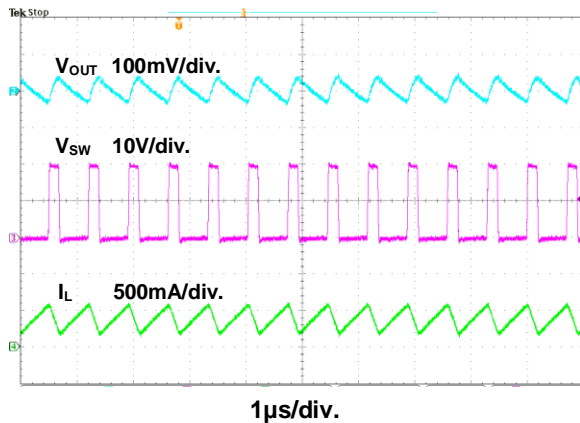


Figure 5. Steady State Waveform

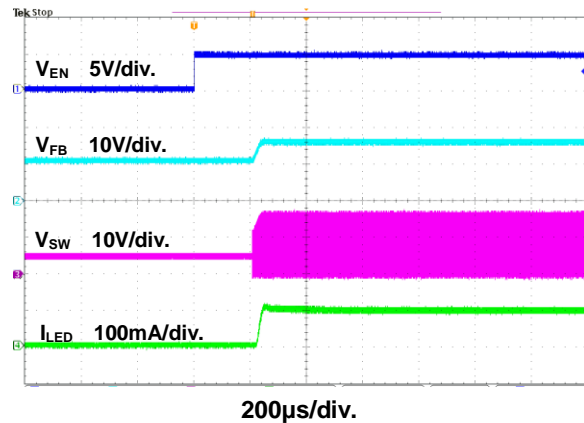


Figure 6. Enable Startup Response Waveform

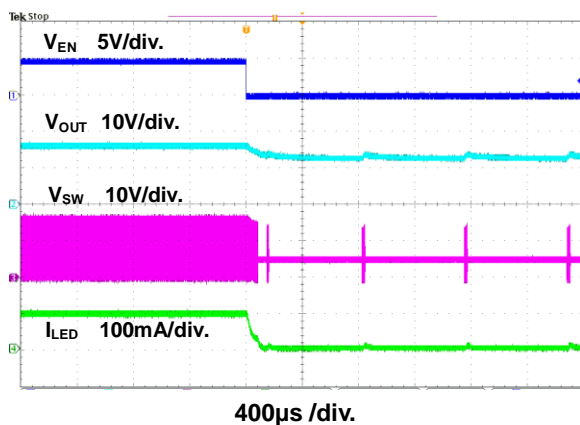


Figure 7. Enable Shutdown Response Waveform

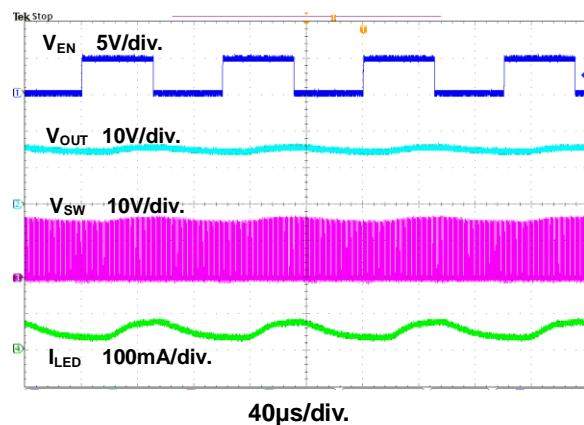


Figure 8. PWM Dimming Response Waveforms at a Frequency of 10kHz

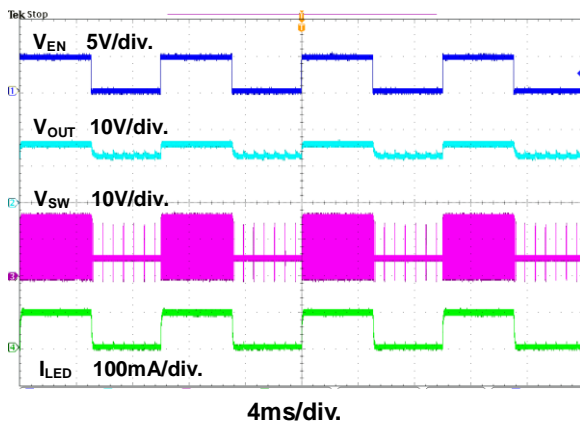


Figure 9. PWM Dimming Response Waveform at a Frequency of 100Hz

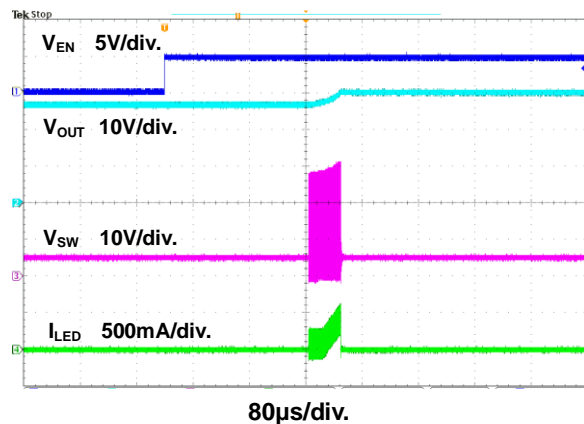


Figure 10. Open Load Protection Waveform

## Typical Performance Curves (Continued)

$V_{IN}=5V$ ,  $C1=10\mu F$ ,  $C2=1\mu F$ ,  $L1=6.8\mu H$ , 5S5P WLEDs.  $T_A=+25^{\circ}C$ , unless otherwise noted.

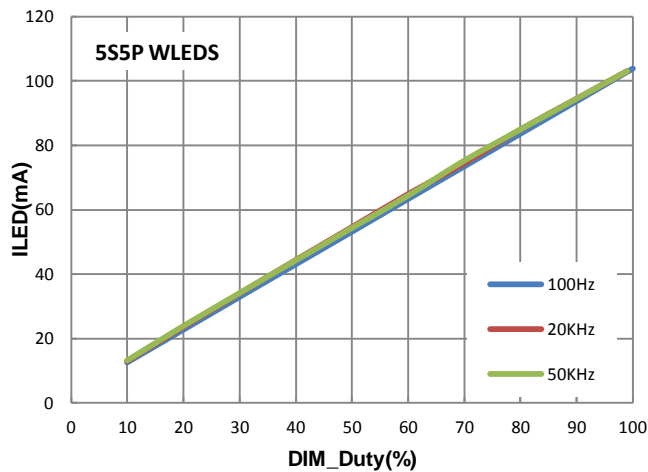


Figure 11. LED Current vs. Duty Cycle

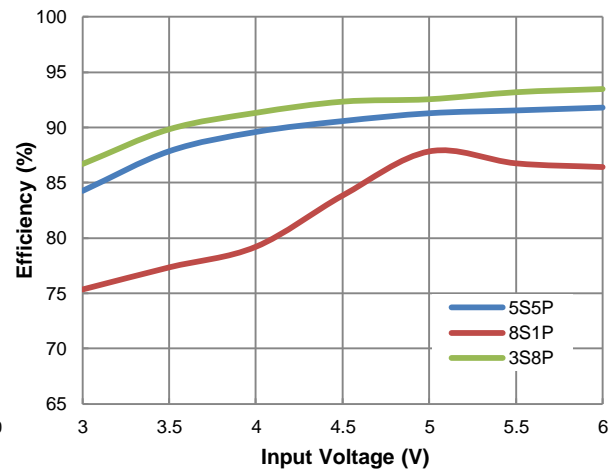


Figure 12. Efficiency vs. Input Voltage.

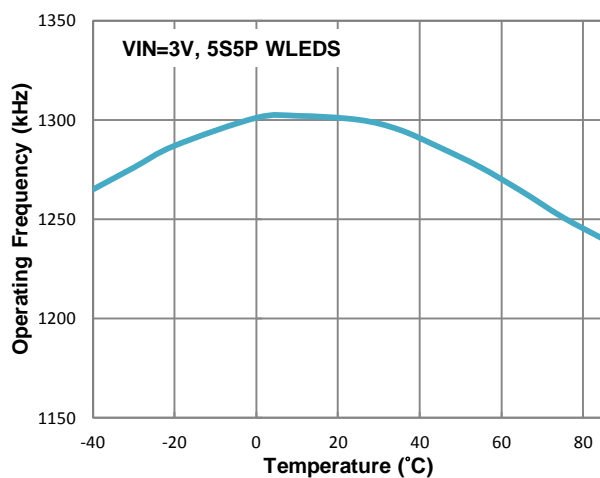


Figure 13. Operating frequency vs. Temperature.

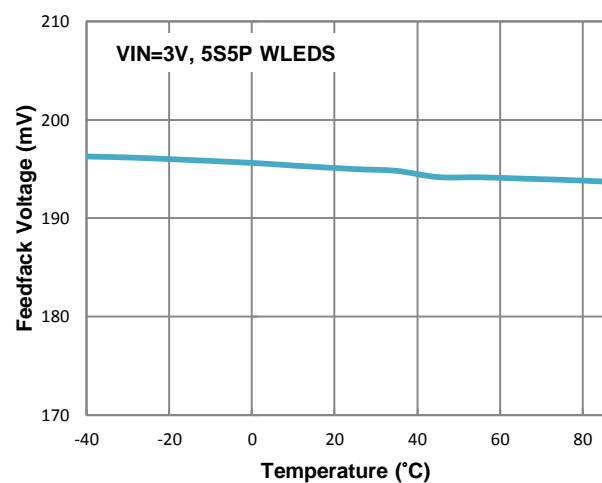


Figure 14. Feedback Voltage vs. Temperature.

## Applications Information

### Operation

The FP6755 is designed in a current mode, fixed-frequency pulse-width modulation (PWM) step-up converter to drive up to 8 series-connected WLEDs. The FP6755 operates well with a variety of external components. See the following sections to optimize external components for a particular application. The PWM controller that goes automatically into PSM mode at light load.

### Inductor Selection

For most applications, a 4.7μH to 15μH is recommended for general use. The inductor parameters, current rating, DCR and physical size, should be considered. The DCR of inductor affects the efficiency of the converter. The inductor with lowest DCR is chosen for highest efficiency. The saturation current rating of inductor must be greater than the switch peak current, typically 2A. These factors affect the efficiency, output load capability, output voltage ripple, and cost.

The inductor selection depends on the switching frequency and current ripple by the following formula:

$$L \geq \frac{V_{IN}}{f_{SW} \times \Delta I_L} \left( 1 - \frac{V_{IN}}{V_{OUT}} \right)$$

Where  $f_{SW}$  is the 1.3MHz switching frequency.  $\Delta I_L$  is the inductor ripple current.

### Capacitor Selection

The ceramic capacitor is ideal for FP6755 application. X5R or X7R types are recommended because they hold their capacitance over wide voltage and temperature ranges than other Y5V or Z5U types. The input capacitor can reduce peak current and noise at power source. The output capacitor is typically selected based on the output voltage ripple requirements. For most applications, a 10μF input capacitors with a 0.47μF output capacitor are sufficient for general use. A higher or lower capacitance may be used depending on the acceptable noise level.

### LED Current Setting

The LED current is specified by resistor from the FB pin to ground. In order to have accurate LED current, precision resistors are preferred (1% is recommended). The LED current can be programmed by:

$$I_{LED} = \frac{195mV}{R_{FB}}$$

### Over Voltage Protection

The FP6755 has an internal open-lamp protection circuit. In the cases of output open circuit, when the LEDs are disconnected from the circuit or the LEDs fail open circuit, the over-voltage function monitors the output voltage through SW pin to protect the converter against. The LED strings open will cause N-MOS to switch with a maximum duty cycle and come out output over-voltage. This may cause the SW voltage exceed its maximum rating then damage built-in N-MOS. In the state, the OVP protection circuitry will be triggered if output voltage exceeds 29V (typ.). The FP6755 can automatically recovery.

### Dimming Control (PWM Signal)

The LED current can be set by modulating the EN pin with a PWM signal.

Changing the LED forward current not only changes the intensity of the LEDs, but also changes the color. Controlling the intensity of the LEDs with a direct PWM signal allows dimming of the LEDs without changing the color.


Dimming the LEDs via a PWM signal essentially involves turning the LED on and off. The LEDs operate at either zero or full current. The amplitude of the PWM signal should be higher than the minimum EN dimming voltage (typically 1.4V). The LED average current increases proportionally with the duty cycle of the PWM signal. The color of the LEDs remains unchanged since the LED current value is either zero or a constant value. The dimming frequency of the PWM signal can up to 50kHz and still retain well linearity. To avoid audio noise, dimming frequency greater than 20kHz is recommended.





## Outline Information



SOT-23-6 Package (Unit: mm)

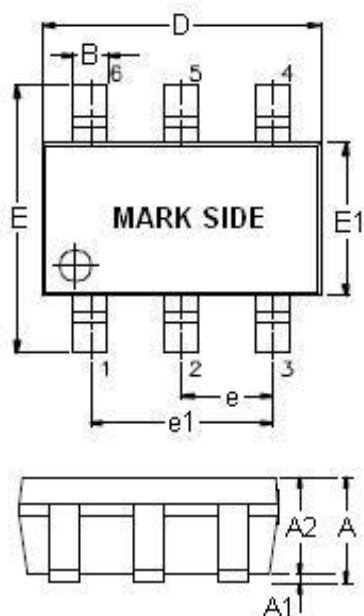

SYMBOLS UNIT	DIMENSION IN MILLIMETER	
	MIN	MAX
A	0.90	1.45
A1	0.00	0.15
A2	0.90	1.30
B	0.30	0.50
D	2.80	3.00
E	2.60	3.00
E1	1.50	1.70
e	0.90	1.00
e1	1.80	2.00
L	0.30	0.60

Note : Followed From JEDEC MO-178-C.


## Carrier Dimensions

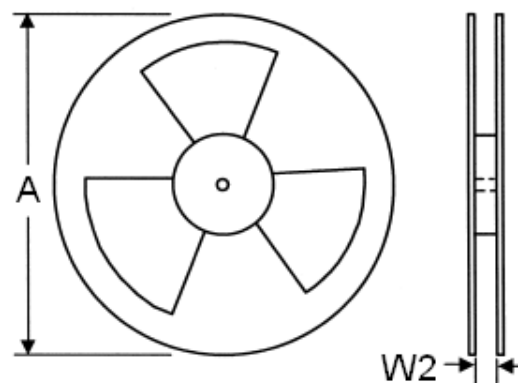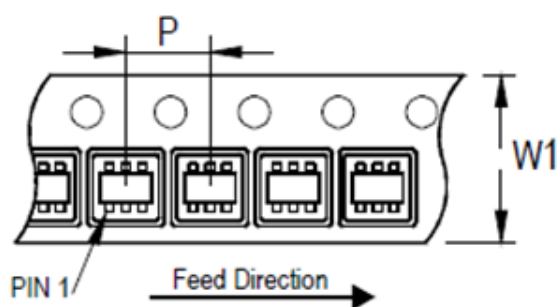

Tape Size (W1) mm	Pocket Pitch (P) mm	Reel Size (A)		Reel Width (W2) mm	Empty Cavity Length mm	Units per Reel
		in	mm			
8	4	7	180	8.4	300~1000	3,000


## Outline Information (Continued)

TSOT-23-6 Package (Unit: mm)

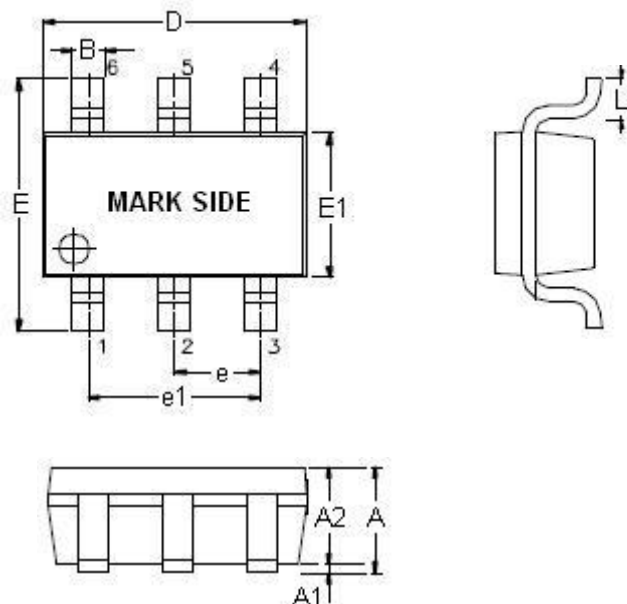

SYMBOLS UNIT	DIMENSION IN MILLIMETER	
	MIN	MAX
A	0.70	0.90
A1	0.00	0.10
A2	0.70	1.00
B	0.30	0.50
D	2.80	3.00
E	2.60	3.00
E1	1.50	1.70
e	0.90	1.00
e1	1.80	2.00
L	0.30	0.60


## Carrier Dimensions

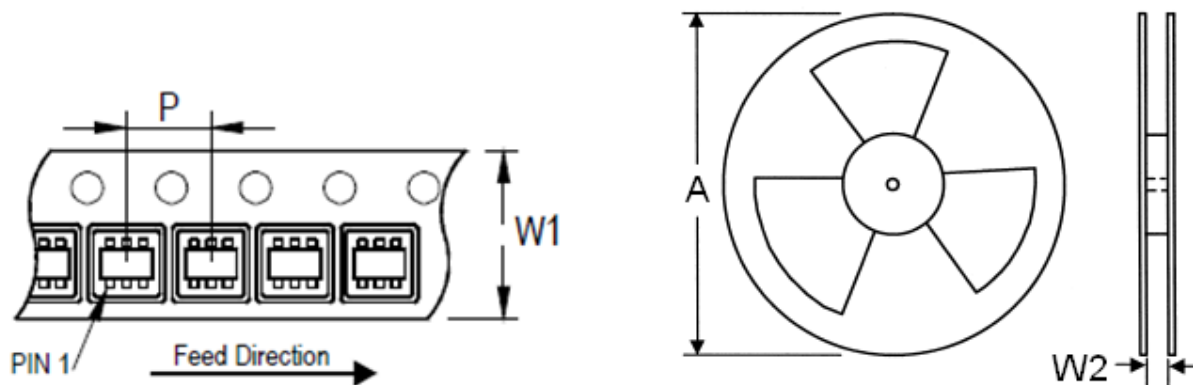

Tape Size (W1) mm	Pocket Pitch (P) mm	Reel Size (A)		Reel Width (W2) mm	Empty Cavity Length mm	Units per Reel
		in	mm			
8	4	7	180	8.4	300~1000	3,000


## Outline Information (Continued)

TDFN-6 2mm×2mm (pitch 0.65 mm)Package (Unit: mm)

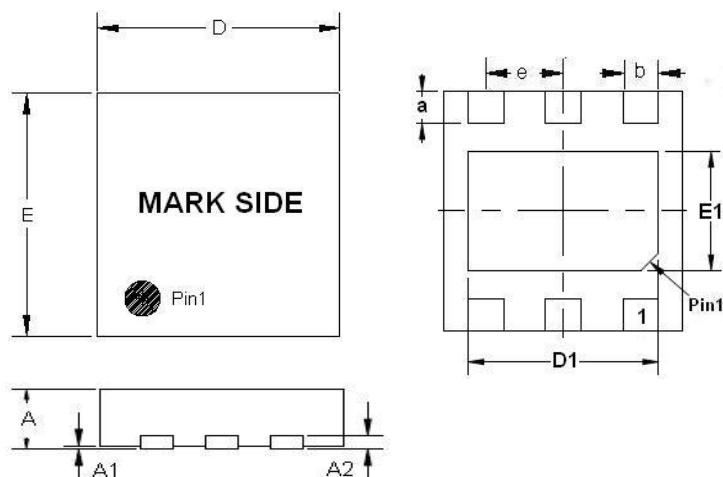

SYMBOLS UNIT	DIMENSION IN MILLIMETER	
	MIN	MAX
A	0.70	0.80
A1	0.00	0.05
A2	0.19	0.22
D	1.95	2.05
E	1.95	2.05
a	0.20	0.40
b	0.25	0.35
e	0.60	0.70
D1	1.15	1.65
E1	0.55	1.05

## Carrier Dimensions

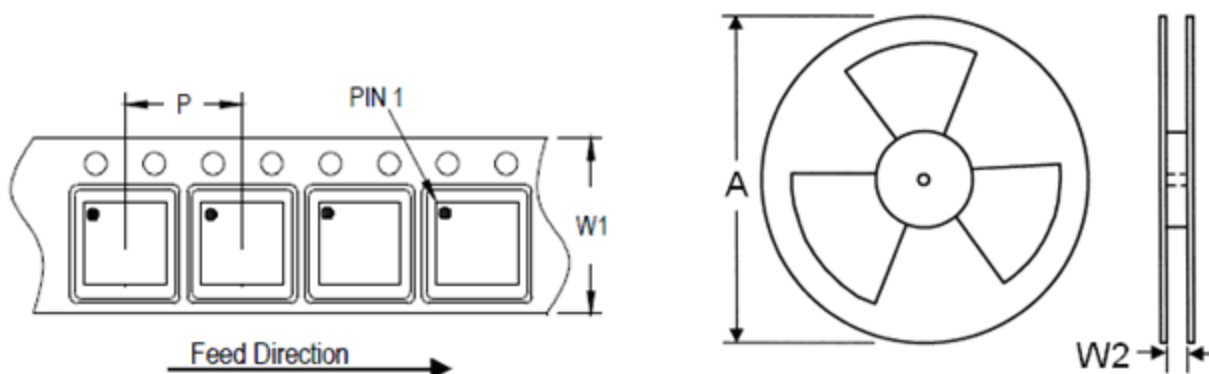

Tape Size (W1) mm	Pocket Pitch (P) mm	Reel Size (A)		Reel Width (W2) mm	Empty Cavity Length mm	Units per Reel
		in	mm			
8	4	7	180	8.4	400~1000	3,000

### Life Support Policy

Fitipower's products are not authorized for use as critical components in life support devices or other medical systems.