

DESCRIPTION

The REMtech Magnetics SMIT-6602 is a “Dry” SMT Modem Isolation Transformer suitable for up to V.90 (56 kbps) consumer and internet analog modem applications compliant with Worldwide safety norms.

SMIT-6602 is our industry’s first transformer in a thin (PCMCIA) profile capable of meeting 56K distortion standards, especially considering that SMIT-6602 meets IEC60950 Supplementary safety norms (known as upcoming UL1950 in the US).


FEATURES

- Suitable for modem speeds up to V.90 (56 kbps).
- Total Harmonic Distortion rated -88 dB typ. @ 600 Hz, -10 dBm and -75 dB typ. @ 150 Hz, -3 dBm.
- Insertion Loss rated 4.10 dB typ. @ 1000 Hz.
- Complies with IEC60950 Supplementary safety norms.
- Reflects 600 Ohms on Primary with 200 Ohms Secondary Load to match 600-ohm telephone lines.
- Uses minimal external components for impedance matching to pan-European CTR-21 telephone lines.
- Very small PCB footprint (25.5 mm x 14.0 mm).
- Thin (PCMCIA) Profile (4.4 mm).
- SMT Industry-standard pin configurations.


PRODUCT COMPLIANCE

- UL / C-UL recognized file number: Pending
- BSI certificate number(s): Pending
- BAPT certificate of recognition: Pending

NOMENCLATURE (Fig. 1)

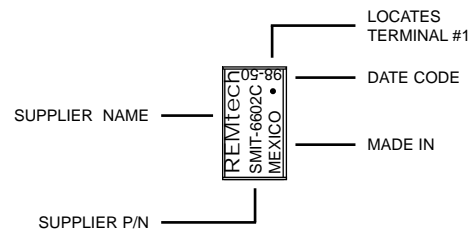

DIMENSIONS

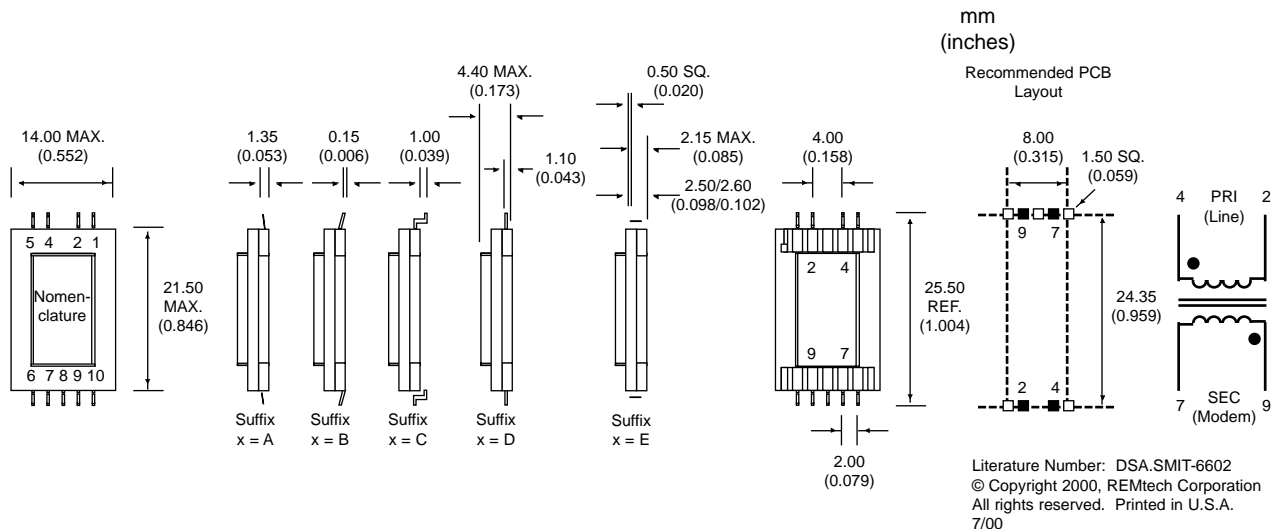


Analog Telephony / Modem Couplers

ELECTRICAL PERFORMANCE SPECIFICATIONS

Electrical Performance Specifications ( $T_A = 25\text{ }^\circ\text{C}$  unless otherwise specified)


PARAMETERS	CONDITIONS	MIN	TYP	MAX	UNITS
Impedance	Reflected on Primary With Load on Secondary	-	600	-	Ohms
		-	200	-	Ohms
Total Harmonic Distortion	@ 600 Hz, -10 dBm @ 150 Hz, -3 dBm	-	-88	-85	dB
		-	-75	-70	dB
Insertion Loss	Per IEEE method; @ 1000 Hz	-	4.10	4.50	dB
Return Loss	200 Hz - 4000 Hz Per 600 Ohm Match (Fig. 3) Per CTR21 Pan-Euro Match (Fig. 10)	18	-	-	dB
		25	-	-	dB
Dielectric Breakdown Isolation Production methods applied:	Safety Standard tested 1 Min.	1500	-	-	Vrms
	HiPot Voltage	1875	-	-	Vrms
	Duration	2	-	-	Sec
	Trip Leakage Current	-	-	200	$\mu\text{A}$
Frequency Response	200 Hz - 4000 Hz	-	$\pm 0.20$	-	dB
Longitudinal Balance	Per FCC part 68.310 60 Hz - 1000 Hz 1000 Hz - 4000 Hz	60	-	-	dB
		40	-	-	dB
DC Resistance @ $20^\circ\text{C}$ , $\pm 10\%$	Primary Winding Secondary Winding	-	250	-	Ohms
		-	225	-	Ohms
DC Current in Primary	-	-	0	-	mADC
Turns Ratio	Primary to Secondary; $\pm 2\%$	-	1:1	-	Turns
Operating Temperature	-	-40	-	105	$^\circ\text{C}$
Storage Temperature	-	-40	-	125	$^\circ\text{C}$
Soldering Temperature	10 Sec. Max.	-	-	260	$^\circ\text{C}$

600 OHM MATCH (Fig. 3)

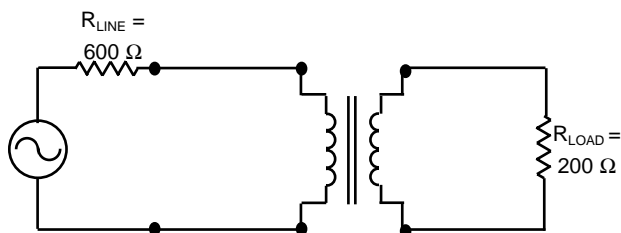

SCHEMATIC EQUIVALENT (Fig. 4)

(Typical Transformer Model @ 1 V, 1 kHz)

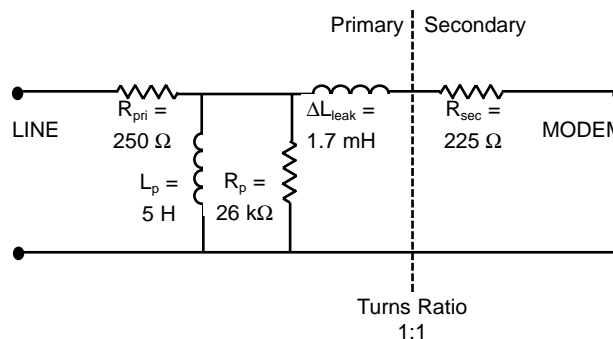


REMtech Corporation makes no assertion or warranty that the circuitry and the uses thereof disclosed herein are non-infringing on any valid US or foreign patents. REMtech assumes no liability as a result of the use of said specifications and reserves the right to make changes to specifications without notice. REMtech does not authorize or warrant any REMtech device for use in life support devices and/or systems. Contact your nearest REMtech Sales Office for the latest specifications.

Literature Number: DSB.SMIT-6602  
© Copyright 2000, REMtech Corporation  
All rights reserved. Printed in U.S.A.  
7/00


STANDARD PACKAGING (Fig. 9)

Tape and Reel Packaging for SMIT-6602

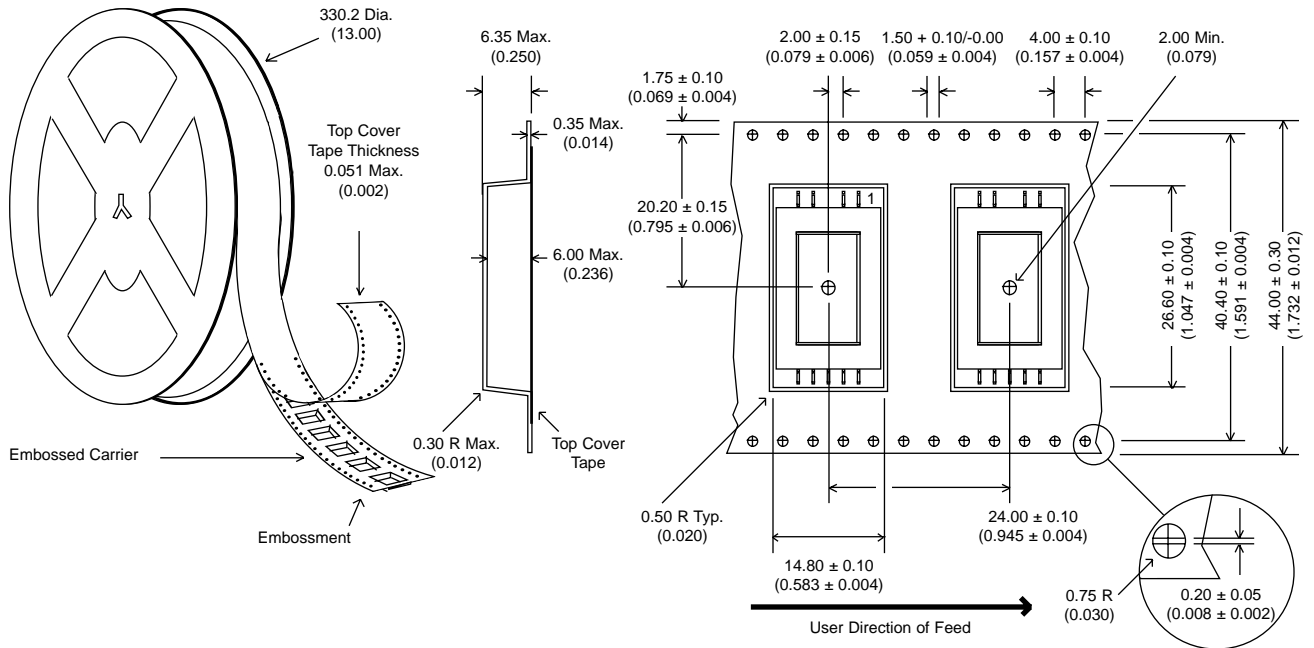

PAN-EUROPEAN CTR21 MATCH (Fig. 10)

(Application circuits available on request for specific national match requirements.)


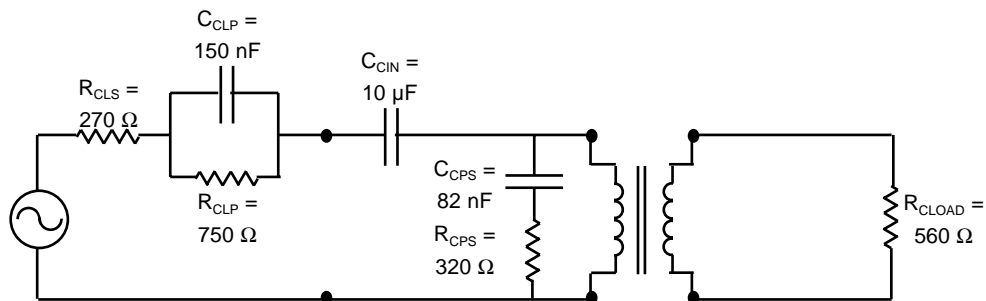


Literature Number: DSC.SMIT-6602  
 © Copyright 2000, REMtech Corporation  
 All rights reserved. Printed in U.S.A.  
 7/00


Analog Telephony / Modem Couplers

PERFORMANCE DATA


TOTAL HARMONIC DISTORTION (Fig. 5)

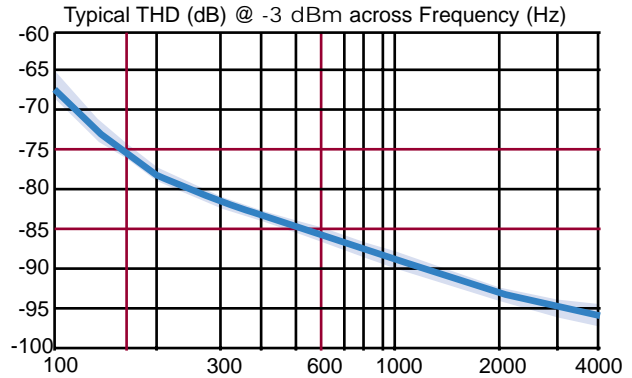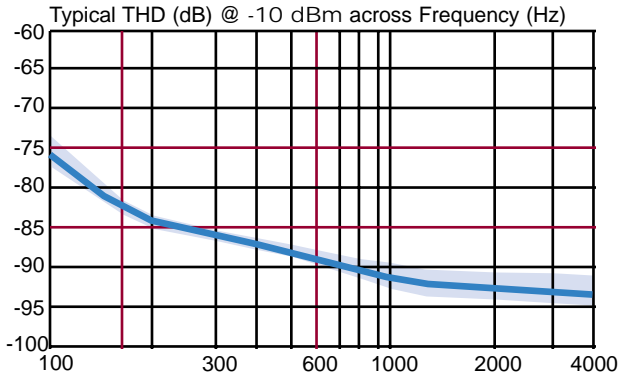



INSERTION LOSS (Fig. 6)

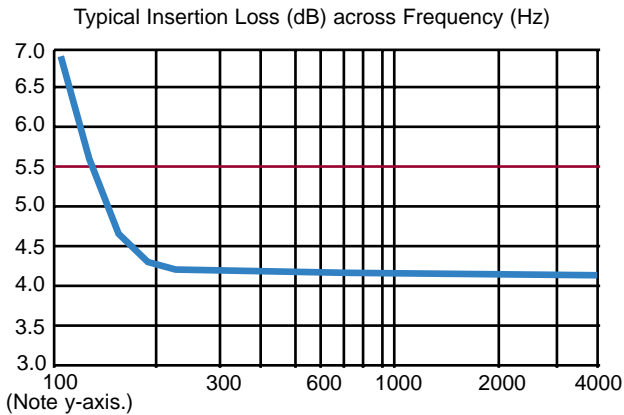

FREQUENCY RESPONSE (Fig. 7)

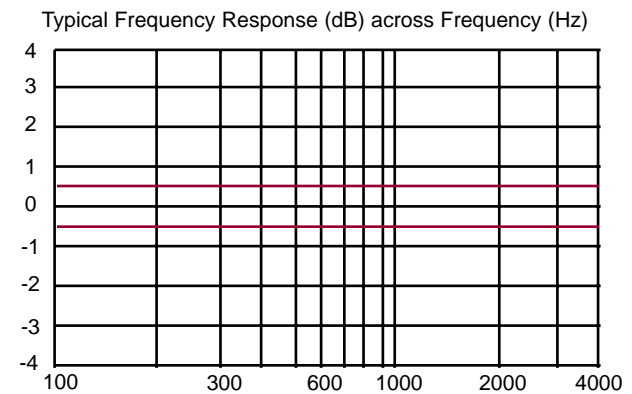

RETURN LOSS (Fig. 8)

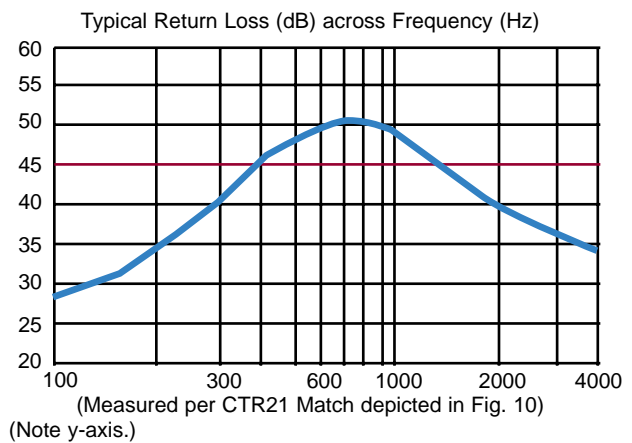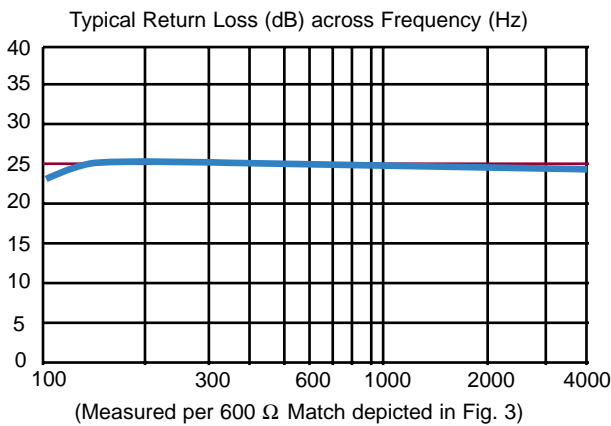

REMtech Corporation makes no assertion or warranty that the circuitry and the uses thereof disclosed herein are non-infringing on any valid US or foreign patents. REMtech assumes no liability as a result of the use of said specifications and reserves the right to make changes to specifications without notice. REMtech does not authorize or warrant any REMtech device for use in life support devices and/or systems. Contact your nearest REMtech Sales Office for the latest specifications.

Literature Number: DSD.SMIT-6602  
© Copyright 2000, REMtech Corporation  
All rights reserved. Printed in U.S.A.  
7/00